



MS-C32

User Manual

V2.8.0 2022.04



Safety Instruction

Before using the product, please read and follow the instructions of this manual carefully, and refer to relevant national and international safety regulations.

ΔAttention

Please do not disassemble or modify the Lidar privately. If you need special instructions, please consult the technical support staff of LeiShen Intelligent.

ΔLaser Safety Level

The laser safety of this product meets the following standards:

- IEC 60825-1:2014
- 21 CFR 1040.10 and 1040.11 standards, except for the deviations (IEC 60825-1, third edition) stated in the Laser Notice No. 56 issued on May 8, 2019. Please do not look directly at the transmitting laser through magnifying devices (such as microscope, head-mounted magnifying glass, or other forms of magnifying glasses).

Eye Safety

The product design complies with Class 1 human eye safety standards. However, to maximize self-protection, please avoid looking directly at running products.



ΔSafety Warning

In any case, if the product is suspected to have malfunctioned or been damaged, please stop using it immediately to avoid injury or further product damage.

Housing

The product contains high-speed rotating parts, please do not operate unless the housing is fastened. Do not use a product with damaged housing in case of irreparable losses. To avoid product performance degradation, please do not touch the photomask with your hands.

Operation

This product is composed of metal and plastic, which contains precise circuit electronic components and optical devices. Improper operations such as high temperature, drop, puncture or squeeze may cause irreversible damage to the product.

Power Supply

Please use the connecting cable and matching connectors provided by LeiShen Intelligent to supply power. Using cables or adapters that are damaged or do not

meet the power supply requirements, or supply power in a humid environment may cause abnormal operation, fire, personal injury, product damage, or other property loss.

Light Interference

Some precise optical equipment may be interfered with by the laser emitted by this product, please pay attention when using it.

Vibration

Please avoid product damage caused by strong vibration. If the product's mechanical shock and vibration performance parameters are needed, please contact LeiShen Intelligent for technical support.

Radio Frequency Interference

The design, manufacture and test of this product comply with relevant regulations on radiofrequency energy radiation, but the radiation from this product may still cause other electronic equipment to malfunction.

Deflagration and Other Air Conditions

Do not use the product in any area with potentially explosive air, such as areas where the air contains high concentrations of flammable chemicals, vapours or particles (like fine grains, dust or metal powder). Do not expose the product to the environment of high-concentration industrial chemicals, including near evaporating liquefied gas (like helium), so as not to impair or damage the product function.

Maintenance

Please do not disassemble the Lidar without permission. Disassembly of the product may cause its waterproof performance to fail or personal injury.

Table of Contents

1. PRODUCT PROFILE	1
1.1 OVERVIEW	1
1.2 MECHANISM	1
1.3 SPECIFICATION	1
1.4 DIMENSIONS	2
2. ELECTRICAL INTERFACE	3
2.1 POWER SUPPLY	3
2.2 INTERFACE BOX	4
2.3 WIRING DEFINITION	5
3. GET READY	6
3.1 LIDAR CONNECTION	6
3.2 SOFTWARE PREPARATION	6
4. USAGE GUIDE	8
4.1 OPERATION UNDER WINDOWS OS	8
4.1.1 Lidar Configuration	8
4.1.2 Windows Client Interface	9
4.1.3 Operation Procedure	12
4.1.4 Point Cloud Data Parsing	12
4.1.5 Parameter Config Example of Lidar Network Communication Mode	13
4.1.6 Note	16
4.2 ROS DRIVER OPERATION UNDER LINUX OS	20
4.2.1 Hardware Connection and Test	20
4.2.2 Software Operation Example	21
5. COMMUNICATION PROTOCOL	22
5.1 MSOP PROTOCOL	22
5.1.1 Format	23
5.1.2 Data Package Parameter Description	24
5.2 DIFOP PROTOCOL	26
5.3 UCWP PROTOCOL	28
5.3.1 Configuration Parameters and Status Description	29
5.3.2 Configuration Package Example	32
6. TIME SYNCHRONIZATION	33
6.1 GPS SYNCHRONIZATION	33
6.2 NTP SYNCHRONIZATION	34
6.3 EXTERNAL SYNCHRONIZATION	34
6.4 LIDAR INTERNAL TIMING	35

7. ANGLE AND COORDINATE CALCULATION	35
7.1 VERTICAL ANGLE.....	35
7.2 HORIZONTAL ANGLE	36
7.2.1 Horizontal Angle Calculation of Single Echo Mode	36
7.2.2 Horizontal Angle Calculation of Dual Echo Mode.....	37
7.3 DISTANCE VALUE	37
7.4 CARTESIAN COORDINATE REPRESENTATION.....	37
8. ACCURATE TIME CALCULATION	38
8.1 CALCULATION OF DATA PACKET END TIME	38
8.2 ACCURATE TIME CALCULATION OF CHANNEL DATA.....	39
8.2.1 End Time of Data Block	39
8.2.2 Calculate the Accurate Time of Channel Data	39
APPENDIX A. LIDAR AVIATION CONNECTOR INTERFACE	41

1. Product Profile

1.1 Overview

The MS-C32 Lidar realizes 360° three-dimensional high-speed scanning with 32 dense laser beams. It reaches a detection distance of up to 200 m, a measurement accuracy of ± 3 cm, and a vertical angular resolution of 1°. This Lidar sensor provides high precision for short-range mapping.

1.2 Mechanism

The MS-C32 mechanical Lidar adopts the Time of Flight method. The Lidar starts timing (t_1) when the laser pulses are sent out. And when the laser encounters the target object and the light returns to the sensor unit, the receiving end stops timing (t_2).

$$\text{Distance} = \text{Speed of Light} \times (t_2 - t_1) / 2$$

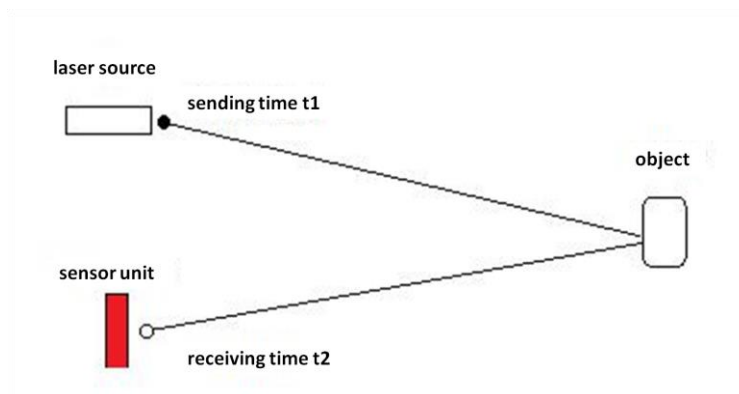


Figure 1.1 Mechanism of MS-C32 Lidar

1.3 Specification

Table 1.1 Specifications (1° Uniform Distribution)

Model	MS-C32
Detection Method	ToF
Wavelength	905 nm
Laser Class	Class 1 (eye-safe)
Channels	32
Detection Range	70m / 120m / 150m / 200m
Range Accuracy	± 3 cm
Data Point Generated	600,000 pts/sec

(Single Echo Mode)		
Data Point Generated (Dual Echo Mode)		1,200,000 pts/sec
FOV	Vertical	-16°~+15°
	Horizontal	360°
Angular Resolution	Vertical	1° (Uniform Distribution)
	Horizontal	5 Hz: 0.09° / 10 Hz: 0.18° / 20 Hz: 0.36°
Scanning Rate		5 Hz / 10 Hz / 20 Hz
Communication Interface		Ethernet / PPS / GPS
Operating Voltage		+9 V~+36 VDC
Operating Temperature		-20°C~+60°C
Shock Test		500 m/sec ² , lasting for 11 ms
Vibration Test		5 Hz~2000 Hz, 3G rms
IP Grade		IP67
Dimensions		Φ120 mm*110 mm
Weight		1600g

1.4 Dimensions

There are 2 location holes and 5 mounting holes at the bottom of the Lidar. The Lidar's horizontal angle of 0° is at the position of the cable interface (or opposite to the interface, please consult sales for more information). The MS-C32 Lidar is equipped with 32 pairs of laser transmitter and receiver modules. It rotates in a clockwise direction, and the motor is driven at a rotation speed of 5 Hz/10 Hz/20 Hz to cover a 360° scan range.

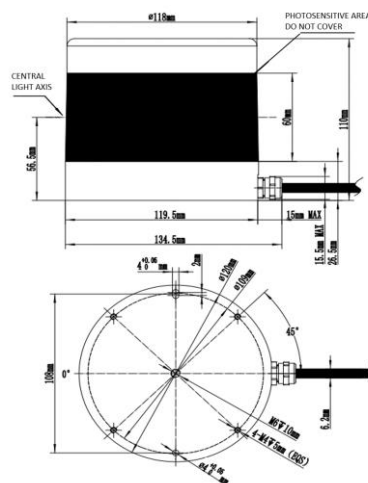


Figure 1.2 Mechanical Drawing

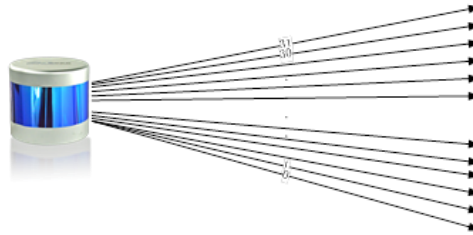


Figure 1.3 Wiring Harness

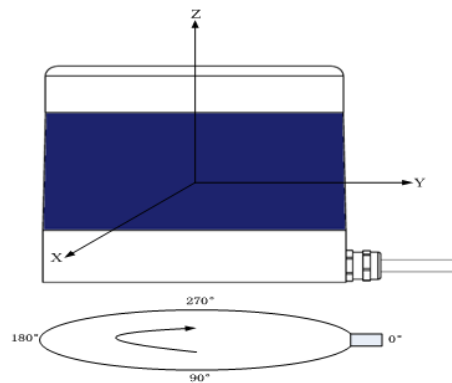


Figure 1.4 Coordinates & Scanning Direction

2. Electrical Interface

2.1 Power Supply

This Lidar's power input range is 9 V~36 VDC. If other DC power supply is adopted, the recommended output voltage is 12 V, 19 V or 24 V. Please note that 9 V and 36 V are short-term power supplies in extreme environments, which cannot be used as working voltage. When the voltage output fluctuates, the Lidar may not be able to work normally.

The maximum output current should be ≥ 2 A (the Lidar requires a large instantaneous current to start, and a small starting current may cause its failure to start normally). The output ripple noise should be <120 mVp-p and output voltage accuracy $<5\%$.

The higher the power supply voltage and the stronger the discharge capacity, the more severe the impact on the Lidar (such as powered by direct vehicle

power supply without adapters or interface boxes). Therefore, it is necessary to use high-power TVS transient suppression diodes to avoid Lidar damage.

The length of the Lidar power supply cable is 5~10 m, and the power supply voltage needs to be over 19 V. If the power cable is more than 10 m long, then it is recommended to use a 220 VAC adapter to supply power (DC long-distance power supply is not recommended).

2.2 Interface Box

The MS-C32 Lidar is connected through an interface box by default. The cable connecting the interface box and the Lidar is 1.5 meters. On the interface box, there are a $\Phi 2.1$ mm DC socket, an indicator light, a RJ45 network port and a 6-pin GPS port, as shown in Figure 2.1.



Figure 2.1 Connecting Lidar with the Interface Box

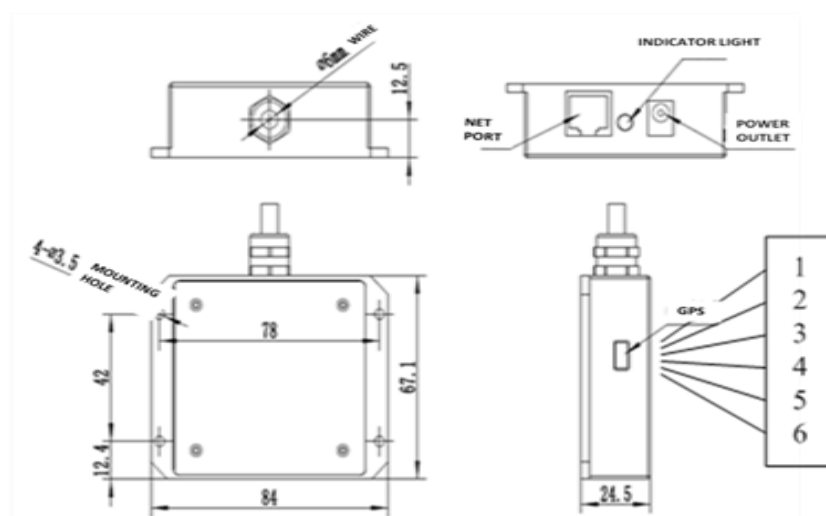


Figure 2.2 Interface Box Dimensional Drawing

Table 2.1 GPS Interface Definition

PIN	Definition
1	NC
2	GND
3	GPS_REC
4	GND
5	+5V
6	GPS_PPS

2.3 Wiring Definition

The function of the interface box is to facilitate the power adapter's and Ethernet cable's direct connection to the Lidar. If the interface box is not needed, users can move the 10-pin terminal wires out of the box and connect them to the power supply, Ethernet interface and GPS device interface separately. To realize this, users only need to disassemble the interface box housing, disconnect the solder joints of the wires, and take out the terminal wires from the interface box. The wiring definition of the 10-pin shielded cable are as follows:

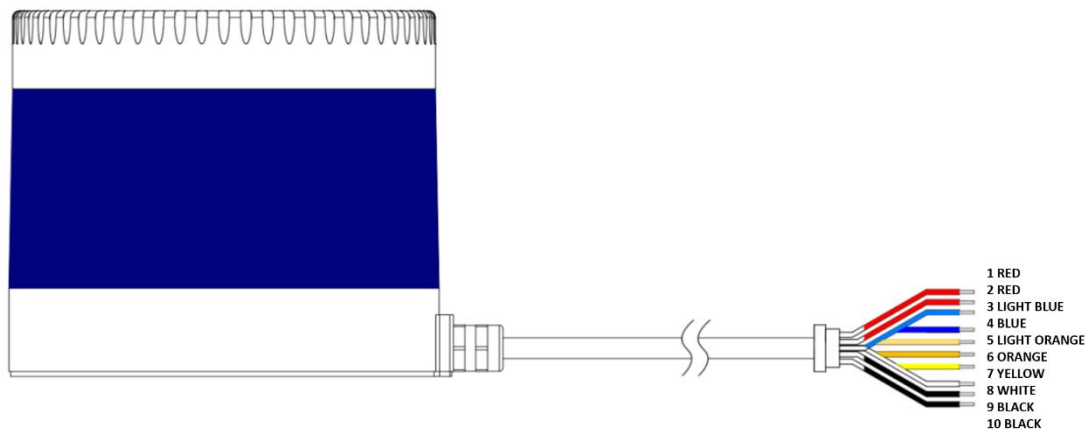


Figure 2.3 The 10-Pin Shielded Cable

Table 2.2 The Specifications and Definition of the 10-Pin Cable

S/N	Wire Color & Size	Definition	Description
1	Red (AWG)	VCC	Power+
2	Red (26AWG)	VCC	Power+
3	Light Blue (26AWG)	TD_P	Ethernet TX+

4	Blue (26AWG)	TD_N	Ethernet TX-
5	Light Orange (26AWG)	RD_P	Ethernet RX+
6	Orange (26AWG)	RD_N	Ethernet RX-
7	Yellow (26AWG)	GPS_PPS	GPS Inputting PPS Signal
8	White (26AWG)	GPS_Rec	GPS Receive
9	Black (24AWG)	GND	Power- (GND)
10	Black (26AWG)	GND	Power- (GND)

3. Get ready

3.1 Lidar Connection

To get ready for the Lidar operation, please connect the Lidar, host computer, GPS module and power supply through the interface box as shown in Figure 3.1.

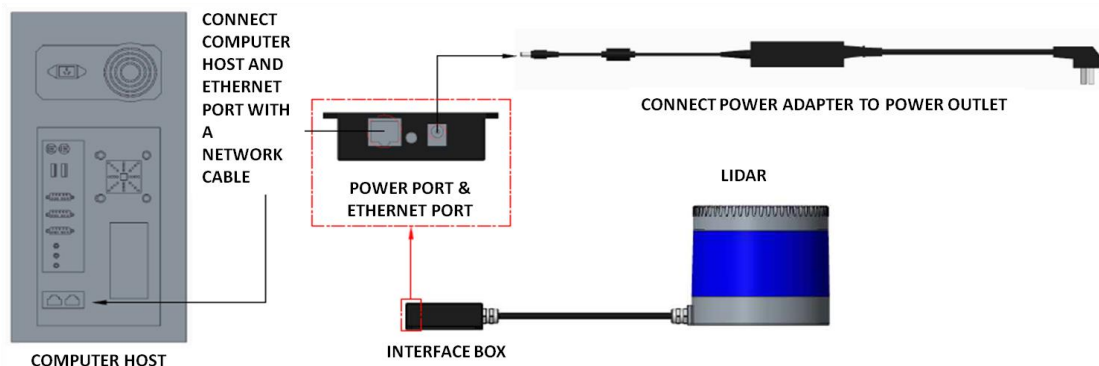


Figure 3.1 Connecting Lidar and Computer

3.2 Software Preparation

This Lidar can be operated under both Windows operating system and Linux operating system. Software needed is as follows:

Wireshark: to capture the ARP (Address Resolution Protocol) packets.

Note: Wireshark is a third-party software, and you may need to download it by yourself. LeiShen Intelligent bears no responsibility for any copyright and commercial disputes caused by users' use of the software.

To view the point cloud data generated by the Lidar, you can either use the **Windows Client** or the **ROS Drive Program**.

Windows Client (optional): a host computer software to view point cloud image under Windows operating system, which is also referred to as “point cloud display software”. Simple functions like parameter configuration, Lidar test and fault detection can be realized through the client, too.

- Software Acquisition

This Windows Client has been pre-stored in the USB flash drive provided along with the Lidar. It can also be obtained from the sales or technical support personnel. No installation is required to the Client.

- Operating Environment

This software can only run under the Windows x64 operating system at present. The computer configuration requirements for installing the software are: CPU: Intel(R) Core (TM) i5 or higher; Graphics Card: NVIDIA GeForce GTX750 or higher achieves the best effect, otherwise the display of the point cloud may be affected. And the computer graphics card must support OpenGL 2 or higher graphics acceleration to display the point cloud normally.

- Supplemental Software

To use the Windows Client, it is necessary to install the **WinPcap** third-party library. This software has also been pre-stored in the USB flash drive provided with the Lidar.

To install the WinPcap software, please follow the following steps:

Step 1. Insert the USB driver into computer port and open it.

Step 2. Find the WinPcap installation file and double-click it to initiate the installation.

Step 3. Click “next” to enter the installation path selection interface.

Step 4. Click “next” to enter the installation interface.

Step 5. Click the “install” button, and wait for the installation to be completed.

ROS Drive Program (optional): to view the point cloud data under Linux operating system. This program has been pre-stored in the USB flash drive provided with the Lidar. It can also be obtained from the sales or technical support personnel. No installation is required.

4. Usage Guide

This part states operation instructions of the Windows Client and ROS drive presented by the LeiShen Intelligent System Co. Ltd.

4.1 Operation Under Windows OS

4.1.1 Lidar Configuration

The default IP address and port number of the Lidar network are as follows:

Table 4.1 Default Lidar Network Configuration

	IP Address	UDP Device Package Port	UDP Data Package Port
Lidar	192.168.1.200	2368 (Fixed)	2369 (Fixed)
Computer	192.168.1.102	2369	2368

Note:

The lidar IP (local IP) and the computer IP (destination IP) cannot be set to the same, otherwise the lidar will not work normally.

In the multicast mode, no two destination ports should be set to the same port number.

The lidar IP range are **forbidden** to be set to

- 1) Class D IP address (multicast address: i.e. 224.0.0.0~ 239.255.255.255)
- 2) Class E IP address (reserved address: i.e. 240.0.0.0~ 255.255.255.254)
- 3) Broadcast address (i.e. 255.255.255.255 and xx.x.255 for each network segment)
- 4) Special class IP address (0.x.xx and 127.xxx)

The lidar destination IP are **forbidden** to be set to

- 1) Class E IP address (i.e. 240.0.0.0 to 255.255.255.254)
- 2) Special class address (0.x.xx and 127.x.x.x)

When connecting to the Lidar, if the computer IP and the Lidar IP are in different network segments, the gateway is needed to be set; if they are in the same network segment, only different IPs are needed to be set, for example: 192.168.1.x, and the subnet mask is 255.255.255.0. If you need to find the Ethernet configuration information of the Lidar, please connect the Lidar to the computer and use "Wireshark" to capture the ARP packet of the device for analysis. For the feature identification of the ARP packet, see the figure below.

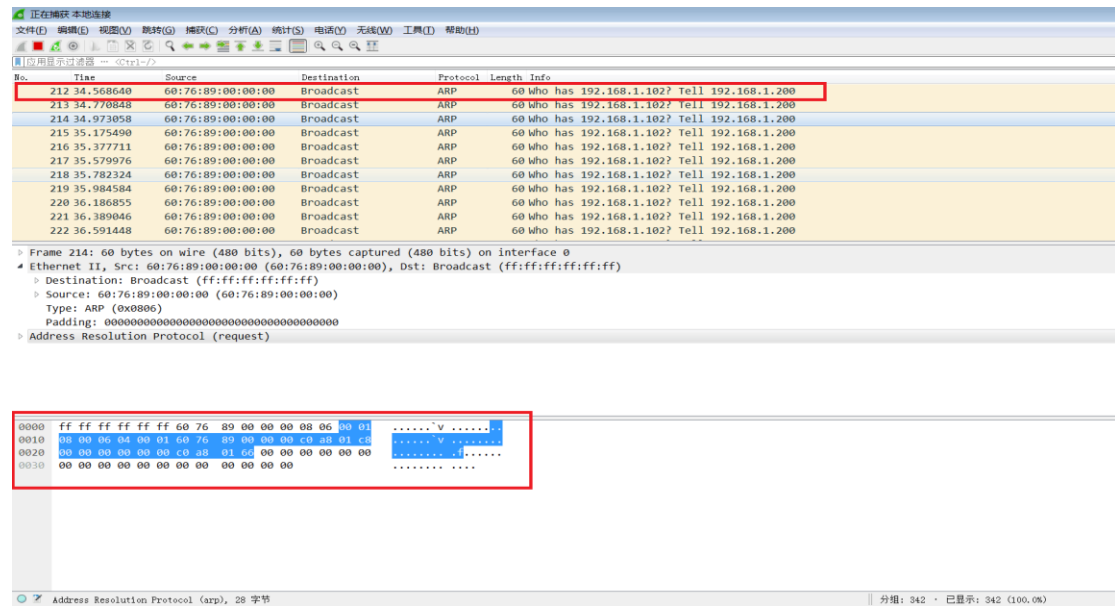


Figure 4.1 Wireshark Captures ARP Packet

4.1.2 Windows Client Interface

The software interface includes menu area, tool bar area, 3D window area, data table area, etc.

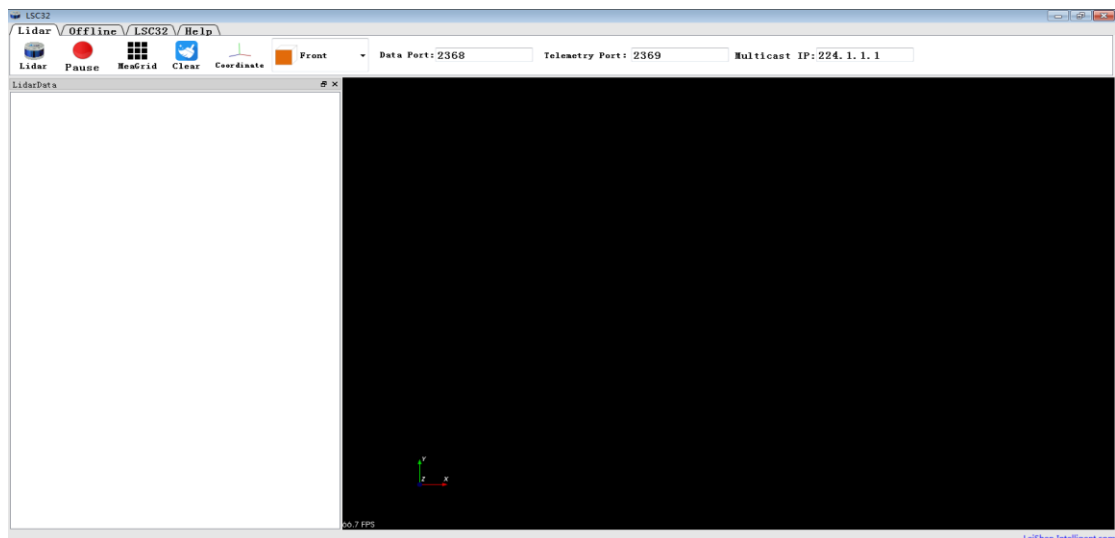


Figure 4.2 Initial Interface

Note: To view the software version, click “Help->About” in the toolbar.










Point cloud display interface supports the following operations:

- 1) Zoom in/out the display interface with the mouse wheel; hold the right mouse button and drag it up/down to zoom in/out.
- 2) Hold the left mouse button and drag it to adjust the angle of view;

3) Hold the mouse wheel and drag it to pan the display interface; or hold the shift key on the keyboard and the left mouse button to pan the interface.

Menu button function introduction

● Lidar Menu

Button	Description
 Lidar	Click to start receiving display data
 MeaGrid	Show/hide measurement grid
 Select	Mark the selected points in the point cloud image
 Suspend Data	Pause point cloud image and data generating
 SelectRange	Select point clouds from different angles
 Clear	Clear screen
 Coordinate	Show/hide coordinate
 LidarDataList	Show/hide the column on the left
 Top Front Left	Three-view option: set the observation angle from top, front, and left.



















Note: In the point cloud display area, with 20 circles and 40*40 grids, the radius of every two adjacent circles differs by 10 m. The difference between each two grids (horizontal or longitudinal) is 10 m. And the radius of the outermost circle is 200 m.





The grids and circles make it easy to view the position of the point cloud. The direction of the coordinate axis in the 3D display interface is consistent with the direction of the X-Y axis in the point cloud reference system.

● Offline Menu

Button	Description
--------	-------------

	Open offline data	
	Record and save data, valid only when Lidar receives data in real time	
	Skip to the beginning	
	When paused, view the previous frame; When playing, rewind (click multiple times to select 2x, 3x, 1/2x, 1/4x and 1x speed)	   
	Click to start playing after the point cloud file is loaded When playing, click to pause	
	When paused, view the next frame; When playing, fast forward (click multiple times to select 2x, 3x, 1/2x, 1/4x and 1x speed)	   
	Skip to the end	
	Drag the progress bar or enter the frame number to skip to the specified position	


● Setup Menu

Button	Description	
	Open Lidar parameter form	The upper part of the form shows the Lidar configuration. The parameters include local IP, destination IP, subnet mask, gateway, data port, device port, and motor speed setting (5Hz/10Hz/20Hz can be selected under combobox), whether to obtain the local time, Mac address information, and device packet sending interval. The lower part shows the real-time status information. According to the DIFOP status packet sent out regularly by the Lidar, the current status information is displayed, including GPS position information, satellite time information, motor speed, current Lidar IP, and current Lidar port number.
	Select laser channel	Vertical Angle column represents the vertical angle of the corresponding channel data and Channel column represents the data sequence number corresponding to the channel.
	Save the data in .csv format	The data includes Points_X, Points_Y, Points_Z, Laser_id, Azimuth, Distance, Intensity.
	Set the display mode of the point cloud	Intensity, laser ID, azimuth angle, etc.

4.1.3 Operation Procedure

Step 1. Set the data port number (default 2368), device package port (telemetry port in the following picture) number (default 2369), and multicast IP.

Data Port: <input type="text" value="2368"/>	Telemetry Port: <input type="text" value="2369"/>	Multicast IP: <input type="text" value="224.1.1.1"/>
--	---	--

Step 2. Click  to receive the Lidar data in real time.

Step 3. The data table contains (PointID、Points_m_XYZ、adjustedtime、Azimuth、Distance、Intensity、Laser_id、timestamp).

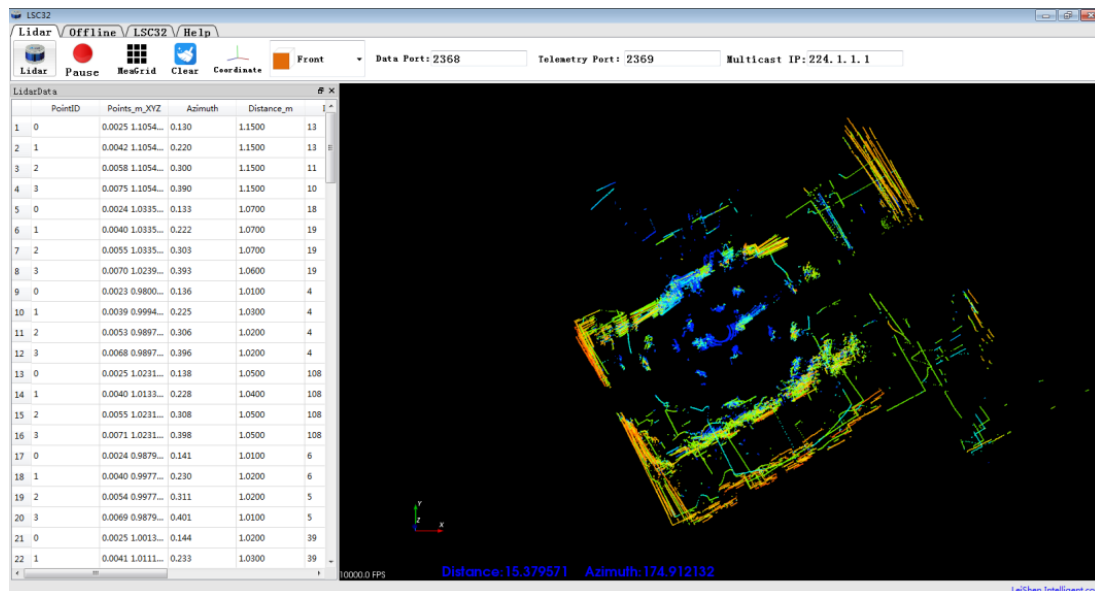


Figure 4.3 Real-Time Lidar Point Cloud Display

4.1.4 Point Cloud Data Parsing

If you need to parse Lidar data, please follow the steps below:

Step 1. Parse the data package to obtain the relative horizontal angle, ranging information, intensity data and microsecond timestamp information of each laser;

Step 2. Read the device package to obtain information such as the horizontal correction angle value, UTC (GPS or NTP time service) and the current configuration of the device;

Step 3. Obtain the vertical angle of each line according to the laser beam distribution;

Step 4. According to the distance measurement value, vertical angle and the calculated horizontal angle of the point cloud data, the XYZ coordinate values are obtained;

Step 5. If necessary, calculate the precise time of the point cloud data through UTC, microsecond timestamp, light-emitting time of each laser, as well as single and dual echo modes;

Step 6. Reconfigure information such as Ethernet, PPS synchronization horizontal angle, motor speed and other information as needed, and pack the configuration package protocol.

4.1.5 Parameter Config Example of Lidar Network Communication Mode

Unicast

If the Lidar IP address and the destination IP (local IP in the following picture) address are in the same network segment, the subnet mask should be configured as 255.255.255.0 and the default gateway remains 0.0.0.0.


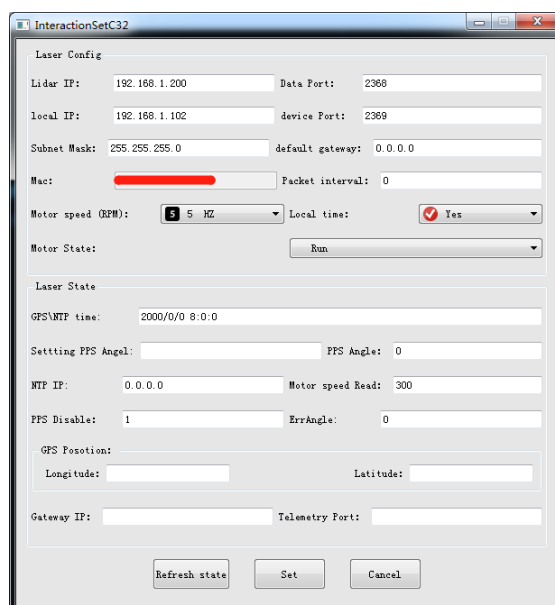


Figure 4.4 Unicast Configuration (1)

When the Lidar IP address and the destination IP address are in different network segments, the subnet mask should be configured as 255.255.255.0, and the gateway and the destination IP address of the Lidar should be on the same network segment. The destination IP address is 192.168.10.102 and the gateway is 192.168.10.1.

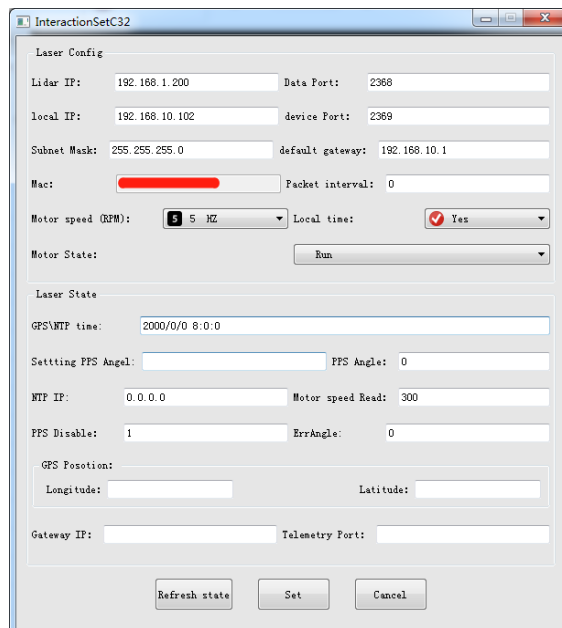

The screenshot shows the 'InteractionSetC32' window with the following configuration:


- Laser Config:**
 - Lidar IP: 192.168.1.200
 - Data Port: 2368
 - Local IP: 192.168.10.102
 - device Port: 2369
 - Subnet Mask: 255.255.255.0
 - default gateway: 192.168.10.1
 - Mac: [redacted]
 - Packet interval: 0
 - Motor speed (RPM): 5 HZ
 - Local time: Yes
 - Motor State: Run
- Laser State:**
 - GPS/WTP time: 2000/0/0 8:0:0
 - Setting PPS Angel: [empty]
 - PPS Angle: 0
 - WTP IP: 0.0.0.0
 - Motor speed Read: 300
 - PPS Disable: 1
 - ErrAngle: 0
 - GPS Position:
 - Longitude: [empty]
 - Latitude: [empty]
 - Gateway IP: [empty]
 - Telemetry Port: [empty]

Buttons at the bottom: Refresh state, Set, Cancel.

Figure 4.5 Unicast Configuration (2)

Multicast

The destination IP is the address of the multicast group. The default subnet mask is 0.0.0.0 and the default gateway is 0.0.0.0.

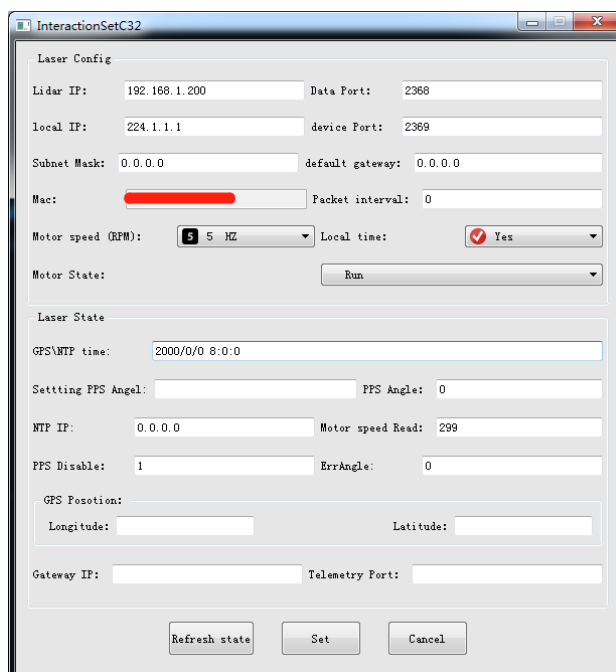

The screenshot shows the 'InteractionSetC32' window with the following configuration:

- Laser Config:**
 - Lidar IP: 192.168.1.200
 - Data Port: 2368
 - Local IP: 224.1.1.1
 - device Port: 2369
 - Subnet Mask: 0.0.0.0
 - default gateway: 0.0.0.0
 - Mac: [redacted]
 - Packet interval: 0
 - Motor speed (RPM): 5 HZ
 - Local time: Yes
 - Motor State: Run
- Laser State:**
 - GPS/WTP time: 2000/0/0 8:0:0
 - Setting PPS Angel: [empty]
 - PPS Angle: 0
 - WTP IP: 0.0.0.0
 - Motor speed Read: 299
 - PPS Disable: 1
 - ErrAngle: 0
 - GPS Position:
 - Longitude: [empty]
 - Latitude: [empty]
 - Gateway IP: [empty]
 - Telemetry Port: [empty]


Buttons at the bottom: Refresh state, Set, Cancel.

Figure 4.6 Multicast Configuration

Broadcast

Under the broadcast mode, the destination IP address is the broadcast address,

and the Lidar IP address and the destination IP address are in the same network segment. Then the subnet mask should be configured as 255.255.255.0, and the default gateway is 0.0.0.0.

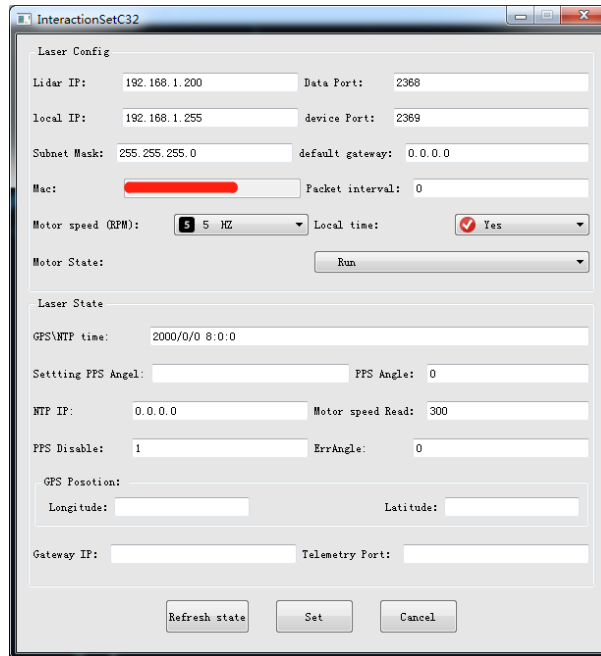

The screenshot shows the 'InteractionSetC32' configuration window. It contains several sections for configuring the laser device:

- Laser Config:**
 - Lidar IP: 192.168.1.200
 - Data Port: 2368
 - Local IP: 192.168.1.255
 - device Port: 2369
 - Subnet Mask: 255.255.255.0
 - default gateway: 0.0.0.0
 - Mac: (redacted)
 - Packet interval: 0
 - Motor speed (RPM): 5 HZ
 - Local time: Yes (checked)
 - Motor State: Run
- Laser State:**
 - GPS\NTP time: 2000/0/0 8:0:0
 - Settting FPS Angel: (empty)
 - FPS Angle: 0
 - NTP IP: 0.0.0.0
 - Motor speed Read: 300
 - FPS Disable: 1
 - ErrAngle: 0
 - GPS Position:
 - Longitude: (empty)
 - Latitude: (empty)
 - Gateway IP: (empty)
 - Telemetry Port: (empty)

At the bottom, there are three buttons: 'Refresh state', 'Set', and 'Cancel'.

Figure 4.7 Broadcast Configuration (1)

When the destination IP address is the broadcast address, but the Lidar IP address and the destination IP address are not in the same network segment, the subnet mask should be configured as 255.255.255.0. And the gateway and the destination IP address of the Lidar should be on the same network segment. The destination IP address is 192.168.10.255 and the gateway is 192.168.10.1.

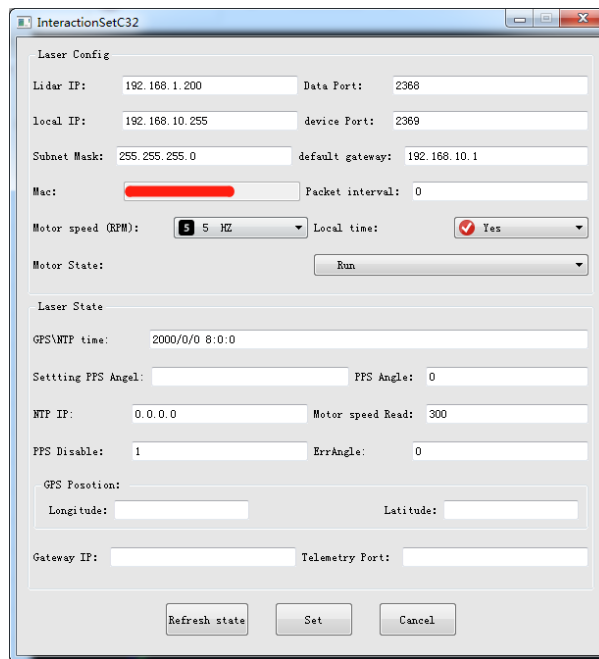


Figure 4.8 Broadcast Configuration (2)

4.1.6 Note

Notice about the Lidar setting and usage:

- 1) It is not possible to use Windows Client to receive data in two processes (open twice at the same time) on the same computer. The port occupancy of the PC is generally exclusive, so the other software that uses the same process or the same port number cannot work normally after a process is bound to a specified port number. When the Windows Client detects that the port is occupied, it will prompt that the communication network port configuration has failed, and automatically close the software. You need to close the software process that occupied the port, and reopen the Client to use it normally.
- 2) At the same time, since Qt is adopted in the low-level software development, please create English paths when naming files and path folders.
- 3) Since the port number of the MS-C32 Lidar can be modified through user configuration, and the Lidar sends data to the host computer through the preset destination IP and port. Therefore, when the local laptop or desktop computer and other devices are receiving data, their IP address should be the same as the destination IP, and the port bound to the local host computer program needs to be the same as the destination port number, as shown in the figure below (these are the data packet parameters captured and analyzed by Wireshark software). The data in the red boxes indicate the

destination IP and port number of the Lidar.

Time	Source	Destination	Protocol	Length	Info	
1 0.000000	192.168.3.208	192.168.3.144	UDP	1248	2368 → 2368	Len=1206
2 0.000704	192.168.3.208	192.168.3.144	UDP	1248	2368 → 2368	Len=1206
3 0.001318	192.168.3.208	192.168.3.144	UDP	1248	2368 → 2368	Len=1206

Figure 4.9 Data Packet Parameters Captured by Wireshark Software

Please set the host computer IP according to the following steps:

Step 1. In the Control Panel -> All Control Panel Items -> Network Connections, click the “Ethernet” icon.

Step 2. Click “Properties” in the pop-up status box, and click “TCP/IPv4 protocol” in the pop-up Ethernet properties box, as shown in the figure below.

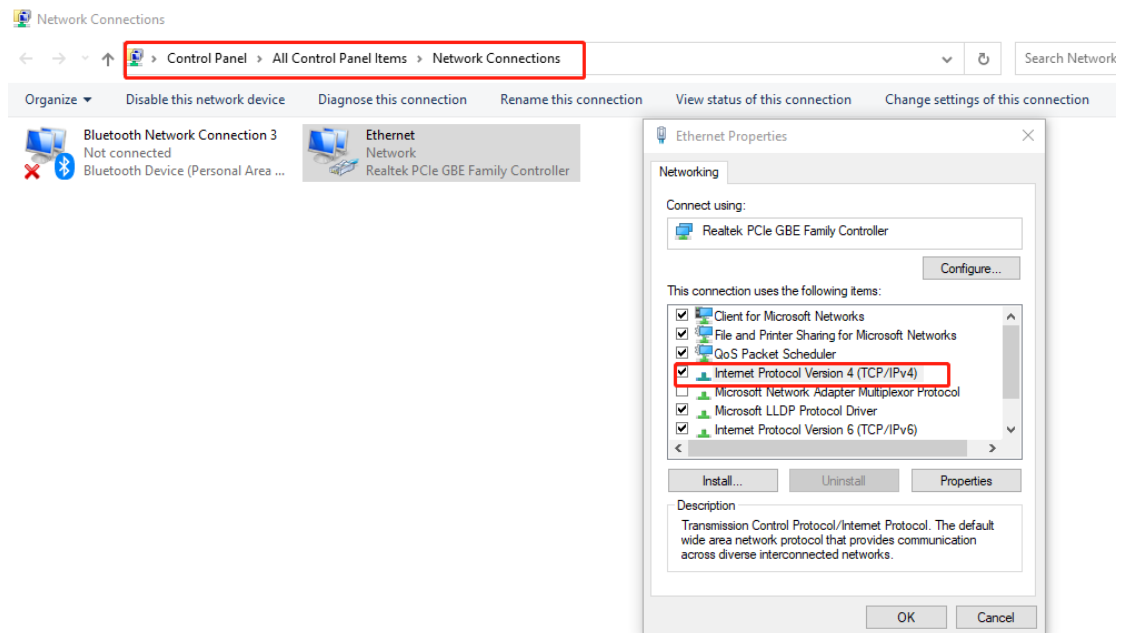


Figure 4.10 Network Connections

Step 3. In the TCP/IPv4 property settings, set the IP address to the Lidar's destination IP (The default destination IP of the Lidar is 192.168.1.102), and the subnet mask is set to 255.255.255.0.

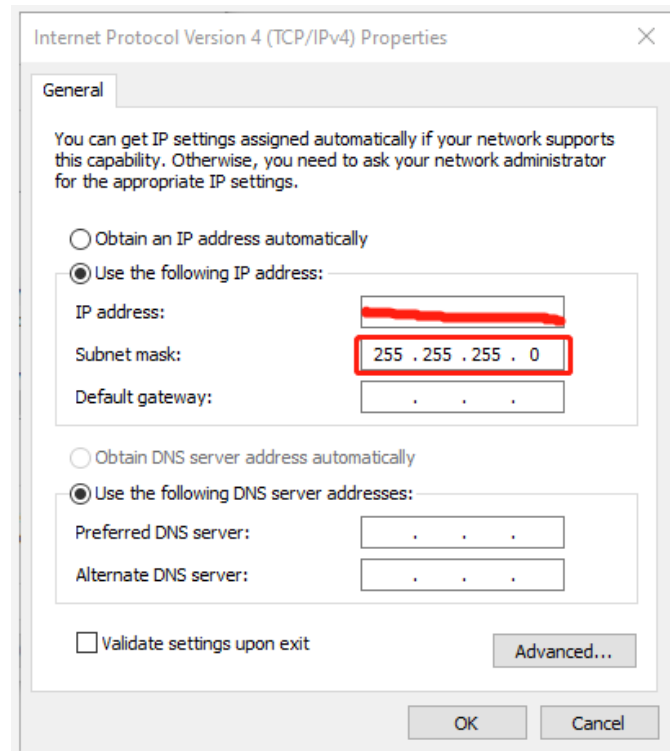


Figure 4.11 IP Address and Subnet Mask Setting

4) Since the Windows Client needs to obtain a large number of data packets through the network in a short time, it may be considered as a malicious program by the network firewall and be prohibited. Therefore, there may be situations in which the data packet has been sent to the computer by the Wireshark software, but the client cannot display it.

To address this problem, in Control Panel -> System and Security -> Windows Firewall Settings, click to allow this program to pass through Windows Firewall, setting steps are as shown in the figures below:

Step 1. In Control Panel -> System and Security -> Windows Defender Firewall, click "Allow an app or feature through the Windows Defender Firewall".

Step 2. Browse to find the software installation path, select it and click OK.

Step 3. Tick the part marked in the red box according to the nature of your network, and click OK to see the data.

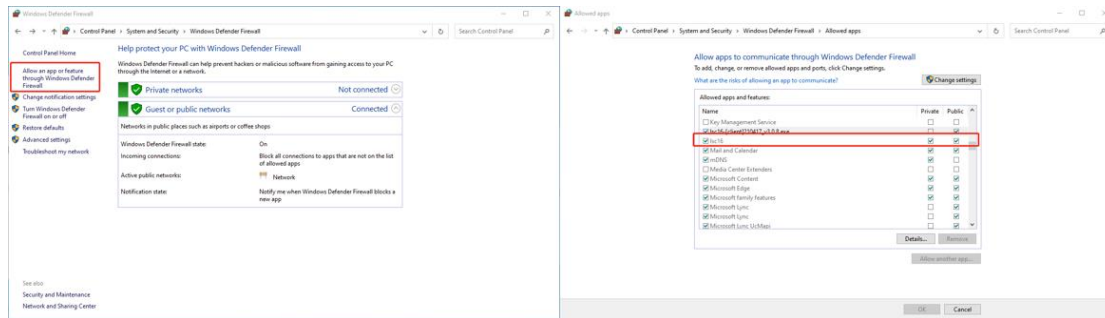


Figure 4.12 Windows Defender Firewall Setting

Computer graphics settings

When installing the Windows Client on a desktop or laptop with dual graphics cards, the default global settings of the computer operating system is to use the global settings (automatic selection: integrated graphics), which affects the display efficiency of the software. In order to ensure the use and display efficiency of the software, you need to manually set the computer graphics.

The condition of dual graphics cards can be checked in the computer configuration, and the condition of the display adapter can be seen in My Computer->Properties->Device Manager.

Take a laptop with Intel(R)HD Graphics 530 integrated graphics and NVIDIA GeForce GTX 960 discrete graphics as an example. The setting steps to manually switch the applicable graphics card of the software to high-performance discrete graphics card are as follows:

Step 1. Right-click on a blank space on the desktop to pop up a right-click menu and select "NVIDIA Control Panel".

Step 2. Select the "Manage 3D Settings" in the NVIDIA Control Panel interface.

Step 3. Click the "Program Settings" button in the Manage 3D Settings interface.

Step 4. Click the "Add" button on the Manage 3D Settings interface.

Step 5. Click the "Browse" button in the pop-up interface.

Step 6. Find the application file (.exe file) of the software according to its installation path in the pop-up browsing interface.

Step 7. Click "OK" to automatically return to the NVIDIA control panel, select the high-performance NVIDIA processor in the combo box of the preferred graphics processor for this program in Option -2., and click "Apply" in the lower right corner.

After the computer application is set, close the NVIDIA Control Panel to

complete the setting.

4.2 ROS Driver Operation Under Linux OS

4.2.1 Hardware Connection and Test

Step 1. Connect the Lidar to the internet and power supply

Step 2. Set the computer wired IP according to the destination IP of the Lidar, (whether the computer wired IP is set successfully can be checked by the ifconfig command, as shown in the figure, the destination IP is 192.168.1.102)

```
ls@ls-Inspiron-15-3511:~$ ifconfig
enxf8e43b292f8c: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.1.102 netmask 255.255.255.0 broadcast 192.168.1.255
    inet6 fe80::898a:1bfd:a729:2f4e prefixlen 64 scopeid 0x20<link>
    ether f8:e4:3b:29:2f:8c txqueuelen 1000 (以太网)
    RX packets 254127 bytes 313581906 (313.5 MB)
    RX errors 254118 dropped 3 overruns 0 frame 254118
    TX packets 76 bytes 9406 (9.4 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

Figure 4.13 ifconfig Command Feedback

Note: The default destination IP of the Lidar is 192.168.1.102, and the computer must be configured according to the actual Lidar destination IP. After setting the IP for the first time, please restart the Lidar.

Step 3. After the Lidar is powered on and restarted, check the wired connection icon of the computer to see whether it is connected properly.

Step 4. Open the terminal: ping the Lidar IP, and test whether the hardware is connected normally. If the ping is successful, then the data is received, otherwise check the hardware connection.

Step 5. Use “sudo tcpdump -n -i eth0” (here eth0 is the name of the wired network device, see the device name of ifconfig wired connection display for details) to view the data packets sent by the Lidar (as shown in the figure, there are 1206-byte data packets sent by the Lidar to the destination, which means that the Lidar data is sent normally).

```
leishen@robot:~$ sudo tcpdump -n -i eth0
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
19:49:08.973111 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.973717 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.974308 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.974913 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.975517 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.976107 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.976714 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
19:49:08.977308 IP 192.168.1.200.2368 > 192.168.1.102.2368: UDP, length 1206
```

Figure 4.14 sudo tcpdump -n -i eth0 Command Feedback

4.2.2 Software Operation Example

Step 1. Establish a workspace and build a compilation environment

```
mkdir -p ~/leishen_ws/src  
cd ~/leishen_ws
```

Note: The workspace can be named arbitrarily. For example, “leishen_ws” can be changed to any name.

Step 2. Download the Lidar ROS driver

The ROS driver can also be obtained directly from our website or customer service. Copy the obtained driver file to the newly created workspace “src”, and decompress it.

Step 3. Compile and package

```
cd ~/leishen_ws  
catkin_make
```

Step 4. Run the program

```
source ~/leishen_ws /devel/setup.bash  
roslaunch ls lidar_c32_decoder ls lidar_c32.launch -screen
```

Reopen a terminal again and execute the following command:

```
roslaunch rviz rviz
```

Note 1): If the Lidar destination port and motor speed are modified, please open “ls lidar_c32.launch” to modify the configuration accordingly. The default data packet port is 2368, device packet port is 2369, IP address is 192.168.1.200.

Note 2): If timeout appears, it means that the driver has no data reception. Please check the hardware connection.

Note 3): If steps 1, 2, and 3 have been completed, next time after the “Displays Window” is reopened, start directly from **Step 4**.

Step 5. Display the data detected by the Lidar

In the “Displays Window” that pops up, modify the value of “Fixed Frame” to “laser_link”. Click the “Add” button at the same time, and click “PointCloud2” under “By topic” to add a multi-line point cloud node.

5. Communication Protocol

Lidar data output and configuration use Fast Ethernet UDP/IP communication protocol. There are 3 UDP packet protocols, among which MOSP packet length is 1254 bytes (42 bytes Ethernet header and 1212 bytes payload). DIFOP and UCWP are 1248 bytes (42 bytes Ethernet header and 1206 bytes payload) Lidar supports unicast, broadcast and multicast communication.

The communication protocols of the lidar are:

Main data Stream Output Protocol (MSOP): outputting the distance, angle, intensity and other information measured by the Lidar;

Device Information Output Protocol (DIFOP): outputting the current status of Lidar and accessory equipment and various configuration information;

User Configuration Write Protocol (UCWP): setting the configuration parameters of the Lidar.

Table 5.1 UDP Packet Protocol

Protocol Name	Abbreviation	Function	Length	Transmission Interval
Main data Stream Output Protocol	MSOP	Outputting measured data and timestamp	1254 bytes	0.69 ms (single echo) 0.29 ms (dual echo)
Device Information Output Protocol	DIFOP	Outputting parameter configuration and status information	1248 bytes	1s (3 packets in a row)
User Configuration Write Protocol	UCWP	Inputting user configured device parameters		not fixed

5.1 MSOP Protocol

The data package outputs measured data such as the angle value, distance value, intensity value, and timestamp of the point cloud. The data of the package adopts Little-Endian mode.

The data package includes a 42-byte Ethernet header and a 1212-byte payload, with a total length of 1254 bytes. The payload consists of 1200 bytes of point

cloud data (12 data blocks of 100 bytes) and 12 bytes of additional information (6 bytes of UTC, 4 bytes of Timestamp and 2 bytes of Factory).

5.1.1 Format

The MS-C32 Lidar supports single and dual echo modes. Single echo mode measures the most recent echo value, and dual echo mode measures the most recent echo and the second recent echo value.

In the single echo mode, one echo data is measured after a single-point laser emission. A point cloud data package contains 12 data blocks, and each data block contains 1 set of 32-channel point cloud data measured in the packing order. Each data block returns only one azimuth angle. See the picture below:

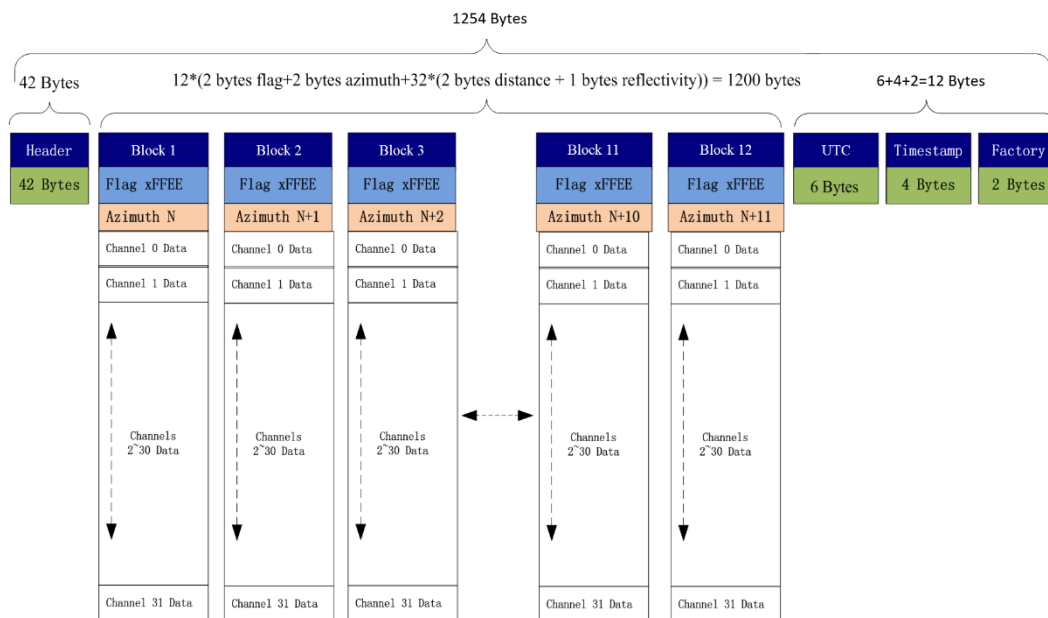


Figure 5.1 Data Format of the Single Echo Mode

When dual echo mode is adopted, two echo data is measured after a single-point laser emission. The data package contains 6 parity data block pairs, and every 2 data blocks contains 1 set of two echo values of 32 channels measured in the packing order. Block (1, 2) is the two echo data of the first 1 set of 32 point cloud data. The odd block is the first echo data, and the even block is the second echo data; the Block (3, 4) is the two echo data of the next set of 32 point cloud data, ..., and so on. Only one azimuth angle is returned for each parity data block pair. See the picture below:

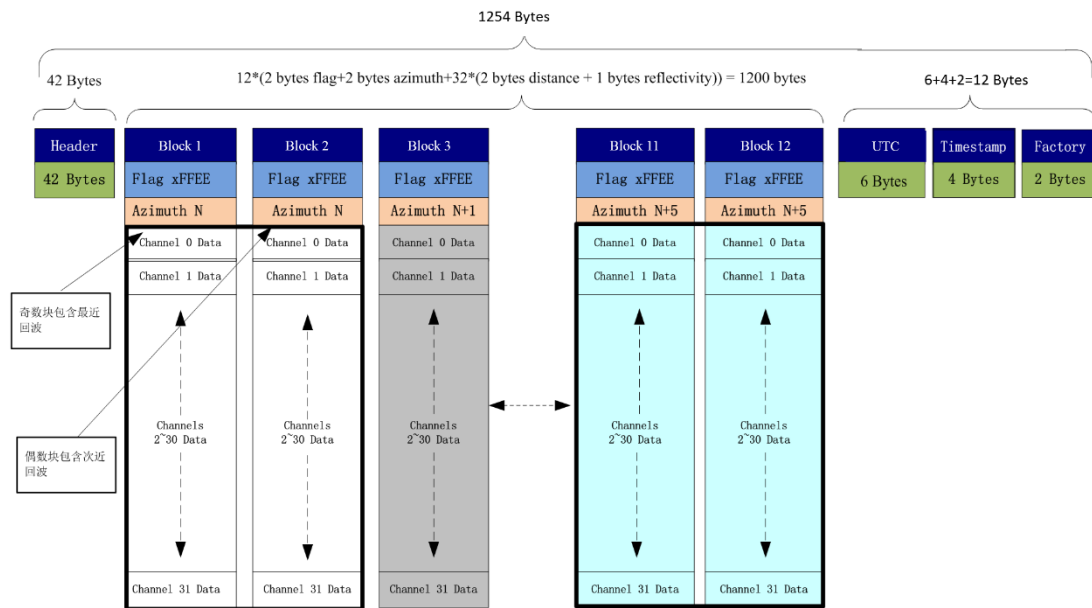


Figure 5.2 Data Format of the Dual Echo Mode

5.1.2 Data Package Parameter Description

Ethernet Header

The Ethernet header has a total of 42 bytes, as shown in the table below.

Ethernet Header: 42 bytes				
Name	S/N	Information	Offset	Length (byte)
Ethernet II MAC	0	Destination	0	6
	1	Source	6	6
Ethernet Packet Type	2	Type	12	2
Internet Protocol	3	Version, Header Length, Differentiated Services, Field, Total Length, Identification, Flags, Fragment Offset, Time to Live, Protocol, Header, Checksum, Source IP Address, Destination IP Address	14	20
UDP Port Number	4	Lidar Port (0x0941, represent 2369)	34	2
	5	Computer Port (0x0940, represent 2368)	36	2
UDP Length & Sum Check	6	Length (0x04BE, represent 1214 bytes)	38	2
	7	Sum Check	40	2

Data Block

The measured data has a total of 1200 bytes, which is composed of 12 data blocks, and each data block is 100 bytes in length.

A data block includes:

- 2 bytes 0xffee fixed value flag bit;
- 2 bytes Azimuth's relative horizontal angle information;
- 32-channel point cloud data (each channel 3 bytes). Each set of 32-channel data (UDP packet encapsulation sequence) corresponds to a 32-channel laser measurement data of the Lidar at a certain launch time.

Note: The packing order of channel data increases in order. This order may be inconsistent with the vertical angle distribution order of the channel and the laser emission measurement time order of the channel, but there is a fixed one-to-one correspondence.

Azimuth

The horizontal angle value—Azimuth represents the angle of the first channel 0 of the data block, which is an absolute value and its unit is 0.01°. To calculate the absolute horizontal value, the horizontal correction angle value A1 and A2 need to be added (refer to the description of the device package). The resolution of the horizontal angle value corresponds to 0.09°, 0.18° and 0.36° according to the motor speed 5 Hz, 10 Hz and 20 Hz.

Channel Data

Channel data is an unsigned integer, the 2 high bytes are distance, and the 1 low byte is intensity, as shown in the following table.

Channel N Data (3 bytes)		
Byte3	Byte2	Byte1
Distance		Intensity

The unit of distance is 0.25 cm. The echo intensity represents the energy reflection characteristics of the measured object, and the intensity value represents the intensity level of 0-255 different reflectors.

Additional Information

The additional information is 12 bytes in length, including 6 bytes of UTC, 4 bytes of microsecond Timestamp and 2 bytes of Factory.

Additional Information: 12 bytes

Name		Length (byte)	Function
UTC		6	UTC (s)
Timestamp		4	Timestamp (μ s)
Factory	Echo information	1	0x37 represents the strongest echo, 0x38 the last echo, 0x39 the dual echo
	Vendor information	1	0x20 represents MS-C32 Lidar

When the NTP service synchronization timing is turned on, the timestamp is synchronized with the time of the NTP server. The range of the timestamp is 0-999999 (μ s);

If the NTP synchronization time service is invalid:

- 1) When there is a GPS device inputting PPS signal to the Lidar, the timestamp is generated with the PPS time as the cycle time, and the range of the timestamp is 0-999999 (μ s);
- 2) When there is an external synchronization device inputting PPS signal, the timestamp is generated with the external synchronization PPS time as the cycle time, and the range of the timestamp is 0-999999 (μ s);
- 3) When there is no synchronization device inputting PPS signal, the Lidar generates timestamps with a period of 1 hour. The range of the timestamp is 0-3599_999_999 (μ s).

5.2 DIFOP Protocol

The device package outputs read-only parameters and status information such as version number, Ethernet configuration, motor speed and operating status, and fault diagnosis. The data of the device package adopts Big-Endian mode.

The device package includes a 42-byte Ethernet header and a 1206-byte payload, with a length of 1248 bytes. The payload is composed of 8-byte frame header, 1196-byte data and 2-byte frame tail.

Figure 5.2 Data Format of the Device Package

Ethernet Header: 42 bytes				
Name	S/N	Information	Offset	Length (byte)
Ethernet II MAC	0	Destination	0	6
	1	Source	6	6
Ethernet Packet Type	2	Type	12	2

Internet Protocol	3	Version, Header Length, Differentiated Services, Field, Total Length, Identification, Flags, Fragment Offset, Time to Live, Protocol, Header, Checksum, Source IP Address, Destination IP Address	14	20
UDP Port Number	4	Lidar Port (0x0940, represent 2368)	34	2
	5	Computer Port (0x0941, represent 2369)	36	2
UDP Length & Sum Check	6	Length (0x04BE, represent 1214 bytes)	38	2
	7	Sum Check	40	2
Payload: 1206 bytes				
Name	S/N	Information	Offset	Length (byte)
Header	0	Device Package Identification Header	0	8
Data	1	Motor Speed	8	2
	2	Ethernet Configuration (IP/port number/MAC/NTP)	10	22
	3	Ethernet Configuration (Gateway/Subnet Mask)	32	8
	4	Lidar Rotation / Stationary	40	2
	5	Device Flow Packet Interval	42	2
	6	PPS Alignment Angle Value	48	2
	7	Alignment Angle Error	50	2
	8	UTC Time	52	6
	9	Latitude and Longitude	58	22
	10	Horizontal Offset Angle of the Outside of the Left Column of the Spot A1	186	2
	11	Horizontal Offset Angle of the Inside of the Left Column of the Spot A3 (0.33 °)	188	2
	12	Horizontal Offset Angle of the Outside of the Right Column of the Spot A2	190	2
	13	Horizontal Offset Angle of the Inside of the Right Column of the Spot A4 (0.33°)	192	2
	14	Version (year/month/day)	1198	4
	15	VERSION_SUBVERSION	1202	2
Tail	16	Frame Tail	1204	2

Header is the device packet identification header, which is fixed as 0xA5, 0xFF, 0x00, 0x5A, 0x11, 0x11, 0x55, 0x55, and the first 4 bytes can be used as the packet inspection sequence. Tail is fixed at 0x0F, 0xF0.

5.3 UCWP Protocol

The UCWP configures the Lidar's Ethernet, PPS alignment angle, motor speed and other parameters, and the data of the configuration package adopts the Big-Endian mode.

The configuration packet includes a 42-byte Ethernet header and a 1206-byte payload, with a length of 1248 bytes. The payload is composed of 8-byte Header, 1196-byte Data, and 2-byte Tail.

Note: It is recommended that users configure the Lidar through the LSMS-C32 Windows Client, and users are forbidden to package and configure the Lidar parameters by themselves; except for the Ethernet configuration, gateway, and subnet mask that require a restart of the Lidar to take effect, other configurations take effect immediately.

Figure 5.3 Data Format of the Configuration Package

Ethernet Header: 42 bytes				
Name	S/N	Information	Offset	Length (byte)
Ethernet II MAC	0	Destination	0	6
	1	Source	6	6
Ethernet Packet Type	2	Type	12	2
Internet Protocol	3	Version, Header Length, Differentiated Services, Field, Total Length, Identification, Flags, Fragment Offset, Time to Live, Protocol, Header, Checksum, Source IP Address, Destination IP Address	14	20
UDP Port Number	4	Lidar Port (0x0941, represent 2369)	34	2
	5	Computer Port (0x0940, represent 2368)	36	2
UDP Length & Sum Check	6	Length (0x04BE, represent 1214 bytes)	38	2
	7	Sum Check	40	2
Payload: 1206 bytes				
Name	S/N	Information	Offset	Length (byte)
Header	0	Configuration Package Identification Header	0	8
Data	1	Motor Speed	8	2

	2	Ethernet Configuration (IP/port number/MAC/NTP)	10	22
	3	Ethernet Configuration (Gateway/Subnet Mask)	32	8
	4	Lidar Rotation / Stationary	40	2
	5	Device Flow Packet Interval	42	2
	6	PPS Alignment Angle Value	48	2
Tail	7	Frame Tail	1204	2

Header is the configuration packet identification header, which is fixed as 0xAA, 0x00, 0xFF, 0x11, 0x22, 0x22, 0xAA, 0xAA, and the first 4 bytes are used as the packet inspection sequence. The Tail of the frame is fixed at 0x0F, 0xF0.

5.3.1 Configuration Parameters and Status Description

Here below are the configuration parameters and status description of specific Lidar information.

Motor Speed

Motor Speed (2 bytes)		
S/N	Byte1	Byte2
Function	Speed: 5Hz/10Hz/20Hz	

The motor rotates clockwise. Three speeds can be set: when it is set to 0x04B0, the speed is 1200rpm; when it is set to 0x0258, the speed is 600rpm; when it is set to 0x012C, the speed is 300rpm. Other setting data is not supported.

Ethernet Configuration

The length of the source IP address "IP_SRC" is 4 bytes and the length of the destination IP address "IP_DEST" is 4 bytes. Each Lidar has a fixed MAC address "MAC_ADDR", which cannot be configured by users. Port1 is the UDP data port number and port2 is the UDP device port number. NTP server address is 4 bytes in length. The internal time of the Lidar can be synchronized from the server address through the NTP protocol.

Ethernet Configuration (22 bytes)								
S/N	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte8
Function	IP_SRC				IP_DEST			
S/N	Byte9	Byte10	Byte11	Byte12	Byte13	Byte14	Byte15	Byte16
Function	MAC_ADDR (Read Only)						Data Port: Port1	
S/N	Byte17	Byte18	Byte19	Byte20	Byte21	Byte22		
Function	Device Port: Port2		NTP server address					

PPS Alignment Horizontal Angle

When the Lidar obtains the PPS signal input from the external device, it controls the Lidar to scan to a specific horizontal angle at the moment. The configuration package sets the PPS alignment angle value, the unit of which is 0.01°. For example, if the alignment angle is 90°, the setting value should be 9000, and the hexadecimal number is 0x2328, corresponding to byte2 = 23h, byte1 = 28h.

PPS Alignment Angle Value (2 bytes)		
S/N	Byte1	Byte2
Function	Configuration PPS alignment angle	

The device package outputs the PPS synchronization time, and the difference between the actual scanning horizontal angle of the Lidar and the set PPS alignment angle value. The unit of the alignment angle error is 0.01°. "Valid is 0" indicates that the second pulse signal is valid. Angle_err[14:0] is the alignment angle error value, which is a signed integer with a range of -18000~18000, that is, between -180° and 180°.

Horizontal Correction Angle

The equipment package outputs the values of the horizontal correction angles A1 and A2. The MS-C32 Lidar has two rows of transmitters, the horizontal correction angle defines the horizontal angle offset of the 32-line beams, which is an unsigned number whose unit is 0.01°.

When calculating the horizontal angle, in addition to considering the horizontal angle value of each channel in the data packet, the horizontal correction angle value must be added.

Horizontal Correction Angle A1 (2 bytes Read Only)		
S/N	Byte1	Byte2
Function	Angle correction value of the leftmost column	
Horizontal Correction Angle A2 (2 bytes Read Only)		
S/N	Byte1	Byte2
Function	Angle correction value of the rightmost column	

UTC Time

When the Lidar detects that the NTP server is turned on, UTC time synchronizes with the NTP server time; when NTP is turned off, the Lidar receives GPS signals, parses the \$GPRMC information, and UTC time synchronizes with GPS; when there is no NTP and GPS timing, UTC time is all 0s. This Lidar supports GPS baud rate of 9600, no parity bit, 8 data bits, 1 stop bit.

The UTC (GMT Greenwich) time output by the device package is accurate to 1s. The GPS time data format is shown in the table below.

UTC Time (6 bytes Read Only)						
S/N	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6
Function	Year	Month	Day	hour	min	sec
	0~255 corresponding to the year 2000~2255	1~12 month	1~31 day	0~23 hour	0~59 min	0~59 sec

Lidar Rotation & Stationary

Lidar Rotation & Stationary (2 bytes)		
S/N	Byte1	Byte2
Function	0: Rotation; 1: Stationary	

x0000 indicates that the Lidar is rotating, 0x0001 indicates that the Lidar is stationary, and the default value of the Lidar is rotating scan.

Device Flow Packet Interval

Device Flow Packet Interval (2 bytes)		
S/N	Byte1	Byte2
Function	0: three packets per second; other values: same as data packet interval	

The configuration 0x0000 means that three packets are sent per second, and other values means the device packet interval is the same as data packet interval. The default value is 0 (three packets per second).

Latitude and Longitude

Latitude and Longitude (22 bytes Read Only)								
S/N	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte8
Function	Reserved	Latitude						
S/N	Byte9	Byte10	Byte11	Byte12	Byte13	Byte14	Byte15	Byte16
Function			Longitude					
S/N	Byte17	Byte18	Byte19	Byte20	Byte21	Byte22		
Function					N/S	W/E		

The latitude and longitude are output in the form of ASCII code.

Gateway Address

Gateway Address (4 bytes)				
S/N	Byte1	Byte2	Byte3	Byte4

Function	Gateway Address
----------	-----------------

Subnet Mask

Subnet Mask (4 bytes)				
S/N	Byte1	Byte2	Byte3	Byte4
Function	Subnet Mask			

5.3.2 Configuration Package Example

If parameters like motor speed, IP address, Lidar device port number, NTP server address, PPS alignment angle value, Lidar rotation/stationary, etc. need to be reset, according to the definition of the configuration package, the 1206-byte payload is set as follows:

Table 5.4 Configuration Package Example

Info	Content	Config	Length (byte)
Header	-	0xAA, 0x00, 0xFF, 0x11, 0x22, 0x22, 0xAA, 0xAA	8
Motor Speed	1200rpm	0x04, 0xB0	2
Lidar IP (IP_SRC)	192.168.1.105	0xC0, 0xA8, 0x01, 0x69	4
Computer IP (IP_DEST)	192.168.1.225	0xC0, 0xA8, 0x01, 0xE1	4
device (MAC_ADDR)	XXXX (Read Only)	0xxxxx	6
Data Port (port1)	XXXX	0xxxxx	2
Device Port (port2)	8899	0x22, 0xC3	2
NTP Server Address	192.168.1.106	0xC0, 0xA8, 0x01, 0x6A	4
Reserved	XXXX	0xxxxx	12
PPS Alignment Angle Value	1.28°	0x00, 0x80	2
Lidar Rotation/Stationary	Rotation	0x00, 0x00	2
Reserved	XXXX	0xxxxx	2
Device Flow Packet Interval	3 Packets	0x00, 0x00	2
Reserved	XXXX	0xxxxx	146
Gateway	192.168.1.1	0xC0, 0xA8, 0x01, 0x01	4
Subnet Mask	255.255.255.0	0xFF, 0xFF, 0xFF, 0x00	4
Reserved	XXXX	0xxxxx	1000
Tail	Fixed Value	0x0F, 0xF0	2

Note: When encapsulating the configuration package, the entire package data must be written completely.

6. Time Synchronization

There are three ways to synchronize the Lidar and external equipment: GPS synchronization, NTP Synchronization and external PPS synchronization. If there is no external synchronization input, the Lidar internally generates timing information. The absolute accurate time of the point cloud data is obtained by adding the 4-byte timestamp (accurate to microseconds) of the data packet and the 6-byte UTC time (accurate to seconds) of the device packet.

6.1 GPS Synchronization

When GPS synchronization is employed, the Lidar will start timing in microseconds after receiving the PPS second pulse, and the time value will be output as the timestamp of the data packet. The Lidar extracts UTC information from the \$GPRMC of the GPS as the UTC time (accurate to the second) output of the device package.

The GPS equipment is time-synchronized to mark and calculate the precise emission and data measurement time of each laser. The precise time of the Lidar point cloud can be matched with the pitch, roll, yaw, latitude, longitude and height of the GPS/inertial measurement system.

The default serial configuration baud rate of the GPS data output received by the Lidar is 9600, 8N1. The PPS high pulse width is required to be more than 40ns.

The standard format of the GPRMC information is as follows:

\$GPRMC, <1>, <2>, <3>, <4>, <5>, <6>, <7>, <8>, <9>, <10>, <11>, <12> *hh

Table 6.1 The Standard Format of GPRMC Information

S/N	Name	Description/Format
1	UTC Time	hhmmss (hour/minute/second)
2	Positioning State	A=Effective Positioning, V=Invalid Positioning
3	Latitude	ddmm.mmmm (degree/minute)
4	Latitude Hemisphere	N (Northern Hemisphere) or S (Southern Hemisphere)
5	Longitude	dddmm.mmmm (degree/minute)
6	Longitude Hemisphere	E (East Longitude) or W (West Longitude)

7	Ground Speed	000.0~999.9 knot
8	Ground Direction	000.0~359.9 degree, take true north as the reference datum
9	UTC Date	ddmmyy (day/month/year)
10	Magnetic Declination	000.0~180.0 degree
11	Direction of Magnetic Declination	E (East) or W (West)
12	Mode Indication	Only NMEA0183 version 3.00 outputs, A= autonomic positioning, D= difference, E=estimation, N=invalid data

The MS-C32 Lidar is compatible with GPS interfaces of multiple data formats. The GPRMC data format only needs to meet the following two requirements: the data after the first comma separator is hour, minute and second information; the data after the ninth comma separator is date information. The following two formats can be used normally:

- 1)
\$GPRMC,072242,A,3027.3680,N,11423.6975,E,000.0,316.7,160617,004.1,W*67;
- 2) \$GPRMC,065829.00,A,3121.86377,N,12114.68162,E,0.027,,160617,,,A*74.

6.2 NTP Synchronization

When connecting to the NTP server for synchronization, the Lidar periodically obtains the time of the NTP server and time it. The time value is used as the timestamp of the data packet, and the extracted UTC time is output as the UTC (GMT Greenwich) time of the device packet. The Lidar sends a timing request to the NTP server every 4 seconds, and the server sends time information to the Lidar according to the NTP protocol after receiving the request.

6.3 External Synchronization

In external synchronization, the Lidar receives the PPS signal input by other external devices and times it in microseconds, and the timing value is output as the timestamp of the data packet. At this time, there is no UTC time reference. If UTC time is required, it must be written in the configuration package, otherwise the UTC time output information of the device package is invalid.

The PPS level of the external synchronization signal is 3.3 V ~ 5 V, and the Lidar receives the rising edge trigger, and the PPS high pulse width is required to be more than 40 ns.

6.4 Lidar Internal Timing

When there is no GPS and other equipment to synchronize, the Lidar uses 1 hour ($360 \times 10^6 \mu s$) as the cycle, with microsecond as the timing unit, and the timing value is output as the timestamp of the data packet. At this time, there is no UTC time reference.

7. Angle and Coordinate Calculation

7.1 Vertical Angle

Each channel of the MS-C32 Lidar corresponds to a fixed vertical angle, see the table below.

Table 7.1 MS-C32 Vertical Angle (1° Uniform distribution)

UDP Packet Encapsulation Sequence (Channel)	Vertical Angle	Horizontal Correction Angle	UDP Packet Encapsulation Sequence (Channel)	Vertical Angle	Horizontal Correction Angle
0	-16°	+A2	16	-8°	+A2
1	0°		17	8°	
2	-15°	+A1	18	-7°	+A1
3	1°		19	9°	
4	-14°	+A2	20	-6°	+A2
5	2°		21	10°	
6	-13°	+A1	22	-5°	+A1
7	3°		23	11°	
8	-12°	+A2	24	-4°	+A2
9	4°		25	12°	
10	-11°	+A1	26	-3°	+A1
11	5°		27	13°	
12	-10°	+A2	28	-2°	+A2
13	6°		29	14°	
14	-9°	+A1	30	-1°	+A1
15	7°		31	15°	

By querying the above table, the vertical angle of the 32-channel data can be obtained. Please note that the sequence of laser emitting is corresponding to the channel number (from channel 0 to channel 31).

7.2 Horizontal Angle

The horizontal angle value of the data packet is a relative value. Because the transmitter of the MS-C32 Lidar is composed of multiple columns, the calculation of the absolute horizontal angle needs to add the horizontal correction angle value of the column where the channel is located. The correction angle values of channel 0, 1, 4, 5, 8, 9, 12, 13, 16, 17, 20, 21, 24, 25, 28, 29 are positive and that of the other channels are negative. The correction angle value is defined in the device package, and is fixed in every Lidar.

7.2.1 Horizontal Angle Calculation of Single Echo Mode

In a single-echo data packet, each data block has only one horizontal angle value, which represents the horizontal angle value corresponding to channel 0 of the earliest transmission measurement of this data block. The angles corresponding to the other 31 channels need to be interpolated. Because the Lidar rotates at a constant speed, the light-emitting time interval of each channel of the data block is the same, so after interpolating the two adjacent angle values (Azimuth N and Azimuth (N+1)), and with the light-emitting time of each channel, the horizontal angle value corresponding to the remaining 31 laser shots of the block can be calculated. This horizontal angle value of the data packet is a relative value, the absolute value can be obtained by adding the corresponding horizontal correction angle.

The data block structure of the MS-C32 single echo packet is as follows:

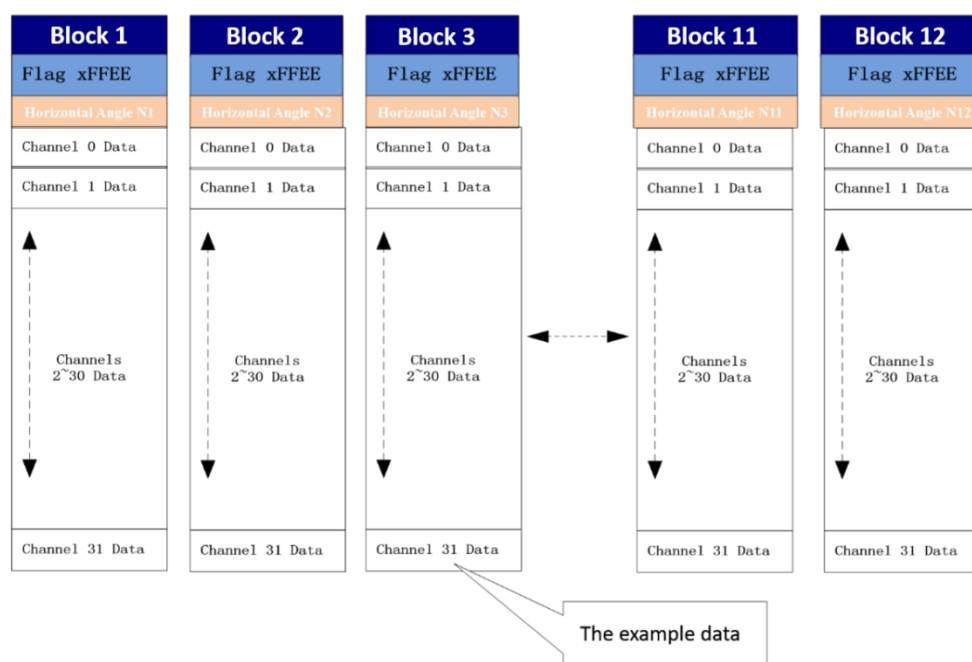


Figure 7.1 Single Echo Data Block Structure

7.2.2 Horizontal Angle Calculation of Dual Echo Mode

In the dual echo data packet, a single-point laser emission obtains two returned data. Each pair of parity data blocks contains two measured values of 16 channels of the two sets of transmission time series, and each pair of parity data blocks returns only one azimuth angle. The angle value provided by the N-th odd-numbered block and the even-numbered block is the horizontal angle value corresponding to Channel 0 measured by the last laser emission, and the angle values corresponding to the other 31 channels need to be calculated by interpolation.

The data block structure of the MS-C32 Lidar's dual-echo packet is as follows:

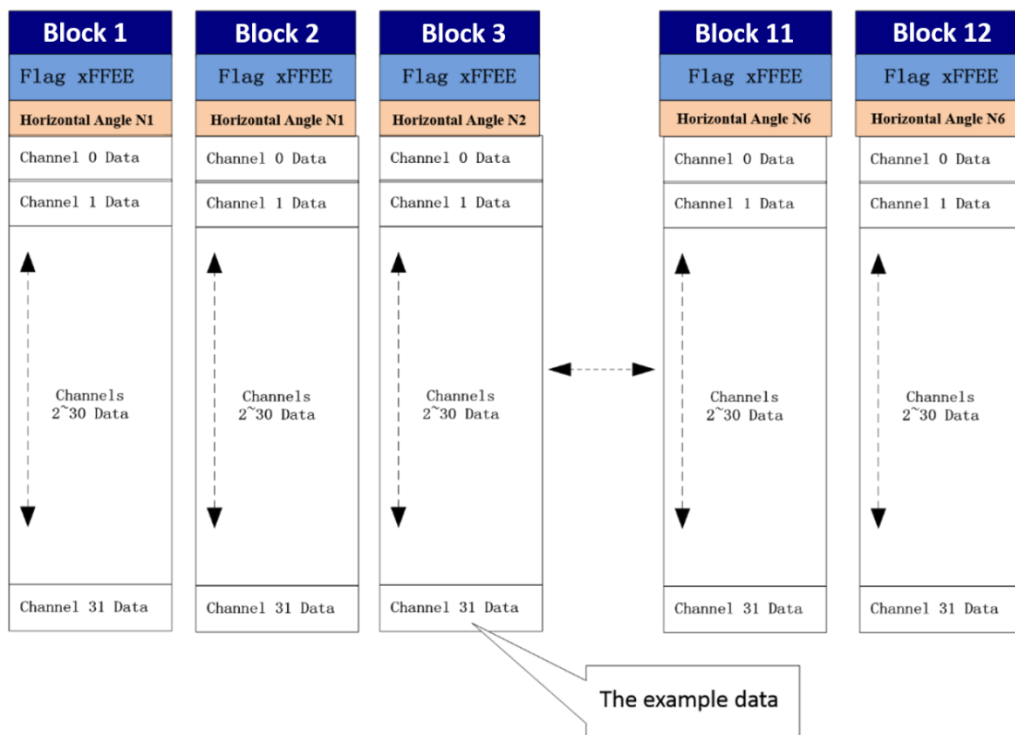


Figure 7.2 Dual Echo Data Block Structure

7.3 Distance Value

Channel data distance calculation: obtain the 2-byte channel distance in the Little-Endian mode of the data packet, assuming it is 0x72,0x06, the hexadecimal number is expressed as 0x0672, the decimal number is 1650, and the unit is 0.25cm, then the distance is $1650 \times 0.25 \text{ cm} = 412.5 \text{ cm}$.

7.4 Cartesian Coordinate Representation

In order to obtain the vertical angle, horizontal angle and distance parameters of the Lidar, the angle and distance information in polar coordinates can be

converted to the x, y, z coordinates in the right-hand Cartesian coordinate system. The conversion relationship is shown in the following formula:

$$\begin{cases} x = r \cos \alpha \cos \theta; \\ y = r \cos \alpha \sin \theta; \\ z = r \sin \alpha \end{cases}$$

In the above formula, r is the distance, α is the vertical angle, θ is the horizontal rotation angle (the horizontal correction angle needs to be considered when calculating). And x, y, and z are the coordinates of the polar coordinates projected onto the x, y, and z axes.




Figure 7.3 Coordinate Mapping

8. Accurate Time Calculation

To accurately calculate the time of the point cloud data, it is necessary to obtain the timestamp of the data packet and the UTC time of the device package output by the Lidar. The timestamp and UTC time come from the same synchronization source, such as a GPS or NTP server.

The light-emitting time interval of each channel of MS-C32 Lidar is 1.536 μ s. The data packet has 12 data blocks, and one data block contains 32-channel data. The measurement time interval of the data block is 1.536 μ s * 32 = 49.152 μ s.

A data packet has a total of 32 * 12 = 384 channel data, and the packet packing time is about 49.152 μ s * 12 ~ 0.59 ms, and the data rate is 1s / 0.6 ms = 1694.9 data packets/sec. Dual echo mode data rate doubled.

8.1 Calculation of Data Packet End Time

The timestamp in the data packet is a relative time in microsecond, which is defined as the packing time of the laser measurement data of the last channel in the data packet (packet end time), and its duration is less than 1 second. Therefore, to calculate the absolute end time of the data packet, it is necessary to obtain the 4-byte microsecond timestamp in the data packet first, and then obtain the UTC time (more than 1 second) from the device package. The addition

of the two will be the exact time when the data packet ends.

8.2 Accurate Time Calculation of Channel Data

To obtain the accurate time of the end of the data packet, knowing that each of the 12 data blocks contains 32-channel light-emitting moments and the light-emitting time interval of each channel, the accurate measurement time of each channel data can be calculated.

8.2.1 End Time of Data Block

Each data block of the MS-C32 Lidar contains 32-channel measurement data. Therefore, the end time interval of each data block (single echo mode) or each parity block pair (dual echo mode) is 49.152 μ s. Assuming that the absolute time of the end of the data packet is $T_{\text{Packet_end}}$, the steps for calculating the end time of the data block $T_{\text{Block_end}}(N)$ are as follows:

Single Echo Mode

The data packet contains 12 data blocks. In single echo mode, each data block includes the measurement data of 32 laser channels. The end time of each data block means that the 32 channels all end emitting light. The end time of each data block is calculated as follows:

$$T_{\text{Block_end}}(N) = (T_{\text{Packet_end}} - 49.152 \mu\text{s} * (12-N)) \quad (N = 1, 2, \dots, 12)$$

Here $T_{\text{Block_end}}(N)$ represents the end time of the N-th data block.

Dual Echo Mode

The data packet contains 12 data blocks. In the dual echo mode, Block (1,2) corresponds to 2 echo measurement data of 32 laser channels. Therefore, the end time of the two blocks is the same, and the light-emitting time of the laser corresponding to the same channel in the block is the same. Block (3,4), ..., Block (11,12) are the same. The end time of each block is calculated as follows:

$$T_{\text{Block_end}}(2N) = T_{\text{Block_end}}(2N-1) = (T_{\text{Packet_end}} - 49.152 \mu\text{s} * (6-N)) \quad (N = 1, 2, \dots, 6)$$

8.2.2 Calculate the Accurate Time of Channel Data

The light-emitting time interval of each channel of the MS-C32 Lidar is fixed as: $T = 49.152 \mu\text{s} / 32 = 1.536 \mu\text{s}$. The light-emitting time has a fixed correspondence with the encapsulation order of UDP packets. Assuming that the light-emitting time of Channel 0 is T_0 , the corresponding 32-channel light-emitting time is shown in the following table:

Table 8.1 MS-C32 Lidar Channel Light-Emitting Time

UDP Packet Encapsulation Sequence (Channel)	light-emitting time (T=1.536us)	UDP Packet Encapsulation Sequence (Channel)	light-emitting time (T=1.536us)
Channel 0	T_0	Channel 16	$T_0+(T*16)$
Channel 1	$T_0+(T*1)$	Channel 17	$T_0+(T*17)$
Channel 2	$T_0+(T*2)$	Channel 18	$T_0+(T*18)$
Channel 3	$T_0+(T*3)$	Channel 19	$T_0+(T*19)$
Channel 4	$T_0+(T*4)$	Channel 20	$T_0+(T*20)$
Channel 5	$T_0+(T*5)$	Channel 21	$T_0+(T*21)$
Channel 6	$T_0+(T*6)$	Channel 22	$T_0+(T*22)$
Channel 7	$T_0+(T*7)$	Channel 23	$T_0+(T*23)$
Channel 8	$T_0+(T*8)$	Channel 24	$T_0+(T*24)$
Channel 9	$T_0+(T*9)$	Channel 25	$T_0+(T*25)$
Channel 10	$T_0+(T*10)$	Channel 26	$T_0+(T*26)$
Channel 11	$T_0+(T*11)$	Channel 27	$T_0+(T*27)$
Channel 12	$T_0+(T*12)$	Channel 28	$T_0+(T*28)$
Channel 13	$T_0+(T*13)$	Channel 29	$T_0+(T*29)$
Channel 14	$T_0+(T*14)$	Channel 30	$T_0+(T*30)$
Channel 15	$T_0+(T*15)$	Channel 31	$T_0+(T*31)$

After the end time of each data block is obtained, the precise measurement time of the point cloud data of each channel in the data block can be calculated according to the corresponding relationship between the channel data packing sequence and the light-emitting time in the above table.

Take the calculation of the data time T_{B3C3} of Channel 3 of Block 3 in single return mode as an example:

1) Calculate the end time of the data packet, obtain the microsecond timestamp $T_{\text{Timestamp}}$ from the data packet, obtain the UTC time T_{UTC} from the device package, and the end time of the data packet $T_{\text{Packet_end}} = T_{\text{Timestamp}} + T_{\text{UTC}}$;

2) Calculate the end time of Block 3 $T_{\text{Block_end}}(3) = (T_{\text{Packet_end}} - 49.152 \mu\text{s} * (12-3)) = (T_{\text{Packet_end}} - 442.368) \mu\text{s} = (T_{\text{Timestamp}} + T_{\text{UTC}} - 442.368) \mu\text{s}$, which is also the Channel 31 time of Block 3.

3) To calculate the Channel 3 time of Block 3, by consulting the table 8.1 above, the difference between the light-emitting time of Channel 3 ($T_0+(T*3)$) and the light-emitting time of Channel 31 ($T_0+(T*31)$) is $T*(31-3) = 28$ laser-emitting period. Therefore, the accurate time of this channel data $T_{B3C3} = (T_{\text{Block_end}}(3) - 28*T) \mu\text{s} = ((T_{\text{Timestamp}} + T_{\text{UTC}} - 442.368) - 28*1.536) \mu\text{s}$.

Take the calculation of the data time T_{B3C3} of Channel 3 of Block 3 in the dual

echo mode as an example:

1) Calculate the end time of the data packet, obtain the microsecond timestamp $T_{\text{Timestamp}}$ from the data packet, obtain the UTC time T_{UTC} from the device package, and the end time of the data packet $T_{\text{Packet_end}} = T_{\text{Timestamp}} + T_{\text{UTC}}$;

2) Calculate the end time of Block 3 $T_{\text{Block_end}}(3) = (T_{\text{Packet_end}} - 49.152\mu\text{s} * (6-2)) = (T_{\text{Packet_end}} - 196.608)\mu\text{s} = (T_{\text{Timestamp}} + T_{\text{UTC}} - 196.608)\mu\text{s}$, which is also the Channel 31 time of Block 3.

3) To calculate the Channel 3 time of Block 3, by consulting the table 8.1 above, the difference between the light-emitting time of Channel 3 ($T_0 + (T * 3)$) and the light-emitting time of Channel 31 ($T_0 + (T * 31)$) is $T * (31-3) = 28$ laser-emitting period. Therefore, the accurate time of this channel data $T_{\text{B3C3}} = (T_{\text{Block_end}}(3) - 28 * T)\mu\text{s} = ((T_{\text{Timestamp}} + T_{\text{UTC}} - 196.608) - 28 * 1.536)\mu\text{s}$.

Appendix A. Lidar Aviation Connector Interface

Lidar Connecting Cable

The connecting cable of MS-C32 Lidar is 3.6 meters in length, the cable and Lidar connection are shown in the figure below:



Figure A.1 Connecting Cable and Lidar Connection

Lidar Cable

The cable in the base of the MS-C32 Lidar is a 9-Pin shielded cable, one end of which is connected to the Lidar, and the other end is connected to the aviation connector (male).

The definition of aviation connector of the Lidar cable is shown in the figure below.

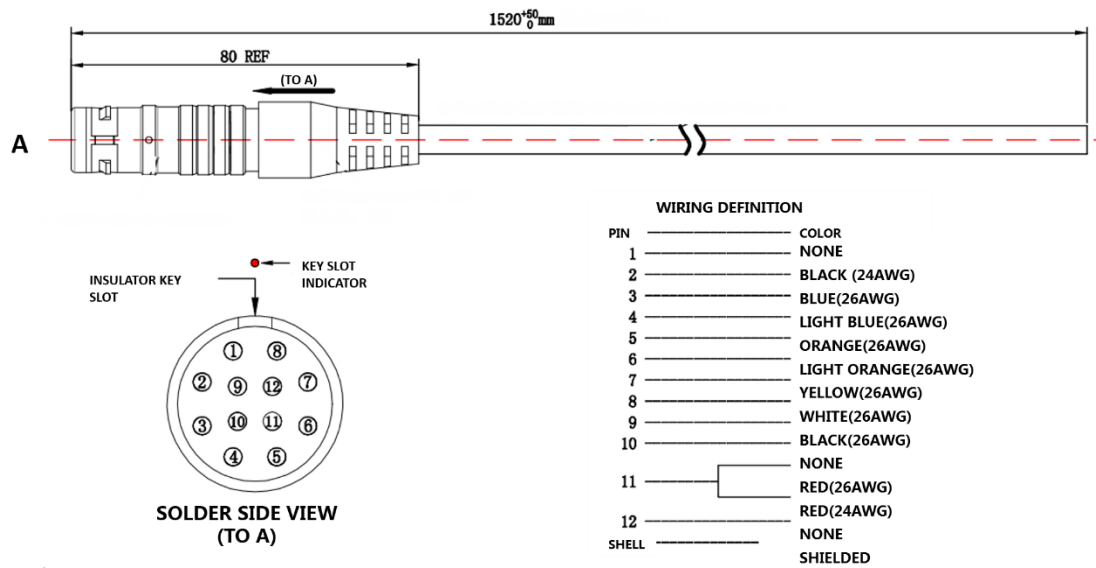


Figure A.2 Lidar Aviation Connector End

Extension Cable

The extension cable is a 9-Pin shielded cable, one end of which is an aviation connector (female), and the other end is wires.

The definition of aviation connector of the extension cable is shown in the figure below:

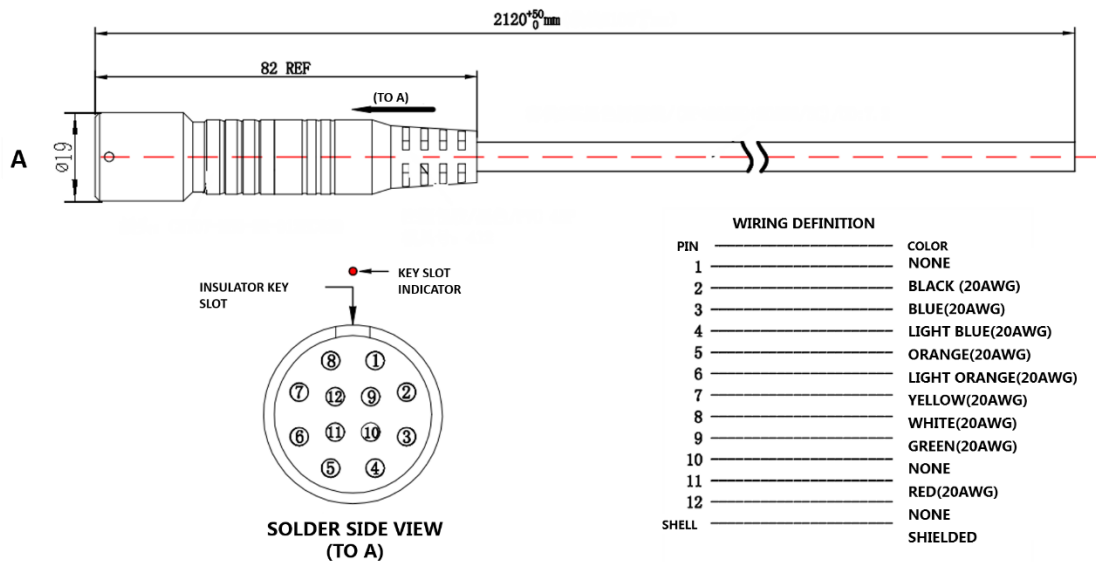


Figure A.3 Extension Cable Aviation Connector End

The definition of wires of the extension cable:

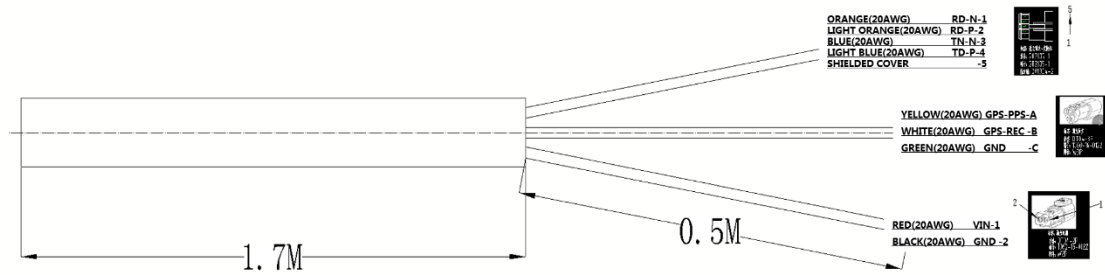


Figure A.4 Wire End of the Extension Cable

The cable details are as follows:

Table A.1 Wire Colors and Specification

S/N	Wire Color and Specification		Definition	Description
	Aviation Connector (male)	Aviation Connector (female)		
1	None	None	None	None
2	Black (24AWG)	Black (20AWG)	GND	Power- (GND)
3	Blue (26AWG)	Blue (20AWG)	TD_P	Ethernet TX+
4	Light blue (26AWG)	Light blue (20AWG)	TD_N	Ethernet TX-
5	Orange (26AWG)	Orange (20AWG)	RD_P	Ethernet RX+
6	Light orange (26AWG)	Light orange (20AWG)	RD_N	Ethernet RX-
7	Yellow (26AWG)	Yellow (20AWG)	GPS_PPS	GPS Inputting PPS Signal
8	White (26AWG)	White (20AWG)	GPS_Rec	GPS Receive
9	Black (26AWG)	Green (20AWG)	GND	Power- (GND)
10	None	None	None	None
11	Red (24AWG+26AWG)	Red (20AWG)	VCC	Power+
12	None	None	None	None

Revision History

[illegible]



Make Safer Driving, Smarter Machine, and Better Life!

Headquarters

LeiShen Intelligent System Co., Ltd.
Floor 4-5, Yunhua Times Building,
Shajing Street, Bao'an District
Shenzhen City, Guangdong Province
China
TEL: +86-0755-23242821

Factory

Building R, Dongbao Industrial Zone
Shasi Community, Shajing Street, Bao'an District
Shenzhen City, Guangdong Province
China
TEL: +86-0755-27190511

French Office

60 Rue Saint Antoine
75004 Paris,
France
TEL: 0033-(0)749044832
Eric Chen

Sales Email: sales@lslidar.com
After-Sales Mailbox: support@lslidar.com
Company Website: www.lslidar.com

*This product information is subject to change without notice.

Copyright ©2022 LeiShen Intelligent System Co., Ltd. All rights reserved.